




PVC LOW DENSITY

High Flexibility + High Resistance

A permanent acrylic-based pressure sensitive adhesive that is a conformable, weather and oxidation resistant closed-cell foam.

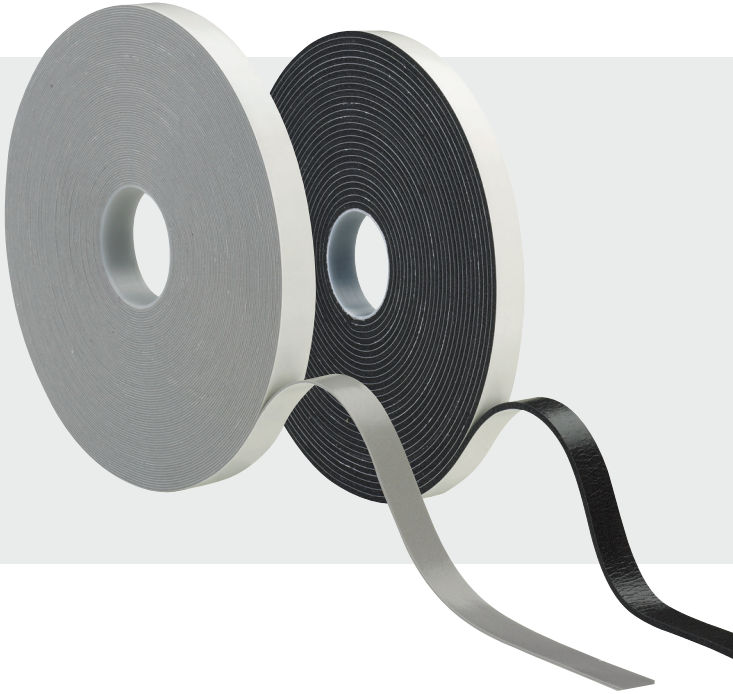

FEATURES:

- A seal against light, air and moisture
- Excellent weather and oxidation resistance
- Good for outdoor applications

APPLICATIONS:

- HVAC
- Appliance
- Construction
- General assembly
- RV/Trailer/Truck

SPECIFICATIONS:

- Test Method: ASTM D1667
- Density (lb/ft³): Low: 7, Medium: 11
- Compression Deflection: Low: 2 psi, Medium: 5 psi
- Compression Set (50%): Low: 8 max, Medium: 17 max
- Service Temperature: Low: -40°F to 180°F; Medium: -30°F to 200°F
- Flammability: FMVSS 302

Can't find your size?
We customize.

Try more
of our
weather stripping
+ gasketing
products!

LOW DENSITY ROLLS, BLACK

3" diameter core

Part Number	Thickness	Width	Length	Rolls/Carton
	in	in	ft	
472101	3/16	1/2	50	20
472103	3/16	1	50	10
472095	1/4	1/2	50	20
472096	1/4	3/4	50	13
472094	1/4	1	50	10
472097	1/4	1-1/2	50	7
472098	1/2	1/2	25	20
472099	1/2	3/4	25	13
472100	1/2	1	25	10

*Roll diameter listed is nominal with a tolerance of +/- 6%.

NEED QUICK TURNAROUND?

Duraco manufactures and converts in-house, providing the convenient service of fast shipping and on-site tape experts. Contact us today.



LET'S TALK